



Datasheet

Radar Level Transmitter

SUP-RD902

Supmea[®]

Committed to process automation solutions

Tel: 86-15158063876

E-mail: info@supmea.com

www.supmea.com

Datasheet

Radar Level Transmitter SUP-RD902

SUP-RD902 radar level meter adopted 26G high frequency radar sensor, the maximum measurement range can reach up to 70 meters. Antenna is optimized further processing, the new fast microprocessors have higher speed and efficiency can be done signal analysis, the instrumentation can be used for reactor, solid silo and very complex measurement environment.

Applications

- Chemical industry
- Solids level measurement
- Sewage treatment
- Mining industry
- Paper and Pulp Industry
- Boiler Engineering
- Liquid and solid powder measure
- Acids, bases or other corrosive media




Features

- Small antenna size, easy to install;
- Almost no corrosion, bubble effect;
- Serious dust environment on the high level meter work has little effect;
- Beam angle is small, the energy is concentrated;
- The measuring range is smaller, for a measurement will yield good results;
- High signal noise ratio, the level fluctuation state can obtain a better performance;
- High frequency measurement of solids and low dielectric constant of the medium;

Radar Level Transmitter

Principle

Radar level transmitter antenna microwave pulse is narrow, the downward transmission antenna. Microwave exposure to the medium surface is reflected back again by the antenna system receives, sends the signal to the electronic circuit automatically converted into level signals (because the microwave propagation speed, electromagnetic wave to reach the target and the reflected back to the receiver this time is almost instantaneous).

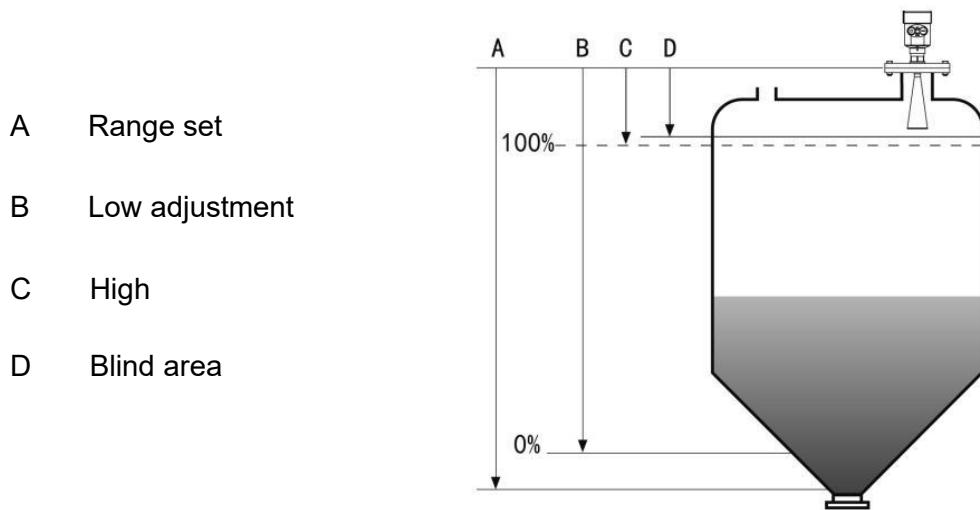

Datum measurement: Screw thread bottom or the sealing surface of the flange.

Note: Make sure the radar level meter the highest level cannot enter the measuring blind area (Figure D shown below).


Parameters

Application	Slightly corrosive liquid
Measuring range	30 m
Process connection	Thread, flange
Process temperature	-40°C~250°C
Process pressure	-0.1 ~ 4.0 MPa
Accuracy	± 3mm
Ingress protection	IP67
Frequency range	26GHz
Supply	2-wire (DC24V) / 4-wire (DC24V / AC220V)
Signal output	4-20mA / HART (2-wire / 4-wire) RS485/ Modbus
Outer covering	Aluminum / plastic / stainless steel

Installation

Be installed in the diameter of the 1/4 or 1/6.


Note: The minimum distance from the tank wall should be 200mm.

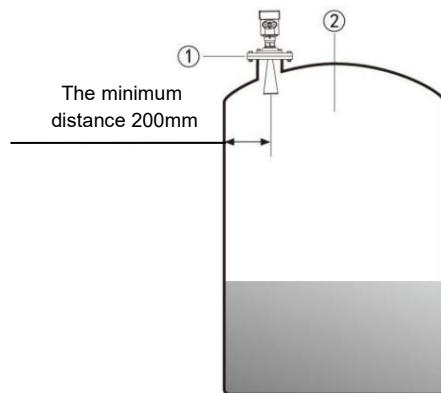

Note: ① Datum


② The container center or axis of symmetry

- The top conical tank level, can be installed at the top of the tank is intermediate, can guarantee the measurement to the conical bottom.

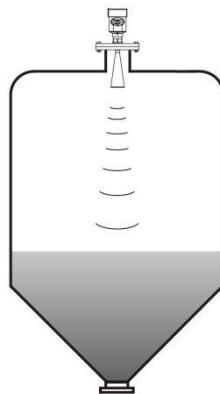


- A feed antenna to the vertical alignment surface. If the surface is rough, stack angle must be used to adjust the angle of cardan flange of the antenna to the alignment surface.

(Due to the solid surface tilt will cause the echo attenuation, even loss of signal.)

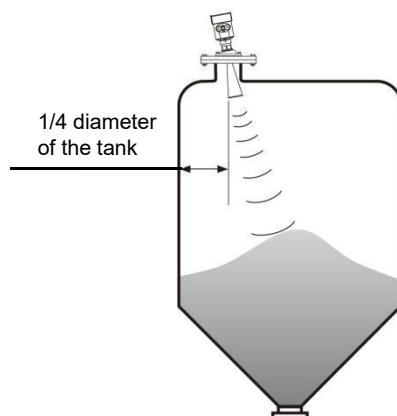


Dimension

■ The outer shell:

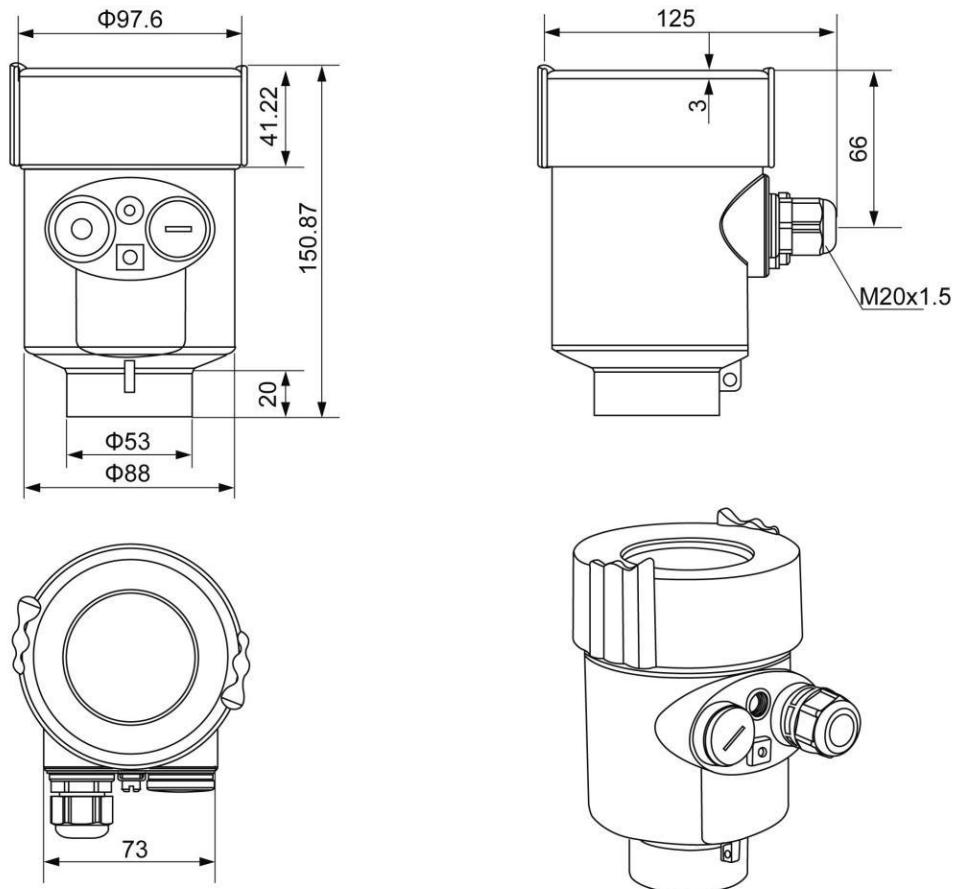


■ Appearance size:

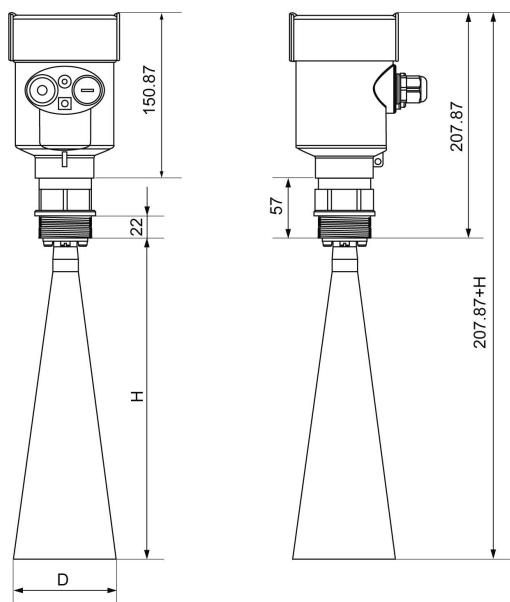

Flange	Trumpet diameter D	Trumpet height H
DN50	Φ46	140
DN80	Φ76	205
DN100	Φ96	290

■ Flange type:

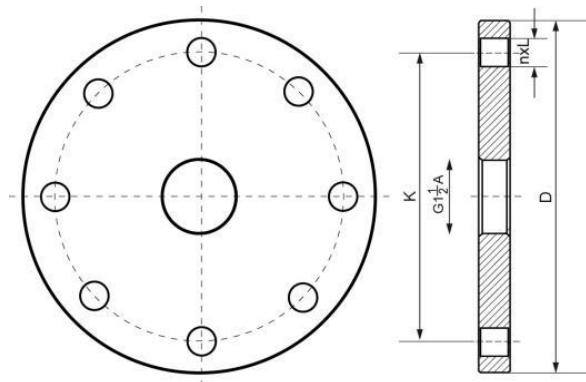


Flange Selection Tables				
Specification	Outer diameter D	Hole center distance K	Number of Holes n	Hole diameter L
DN50	Φ165	Φ125	4	18
DN80	Φ200	Φ160	8	18
DN100	Φ220	Φ180	8	18
DN125	Φ250	Φ210	8	18
DN150	Φ285	Φ240	8	22
DN200	Φ340	Φ295	12	22
DN250	Φ405	Φ355	12	26

Meter Linearity

■ SUP-RD902


Emission angle Depending on the size of the antenna

- Ø 46mm	18°
- Ø 76mm	12°
- Ø 96mm	8°
- Ø 121mm	6°
Precision	See chart

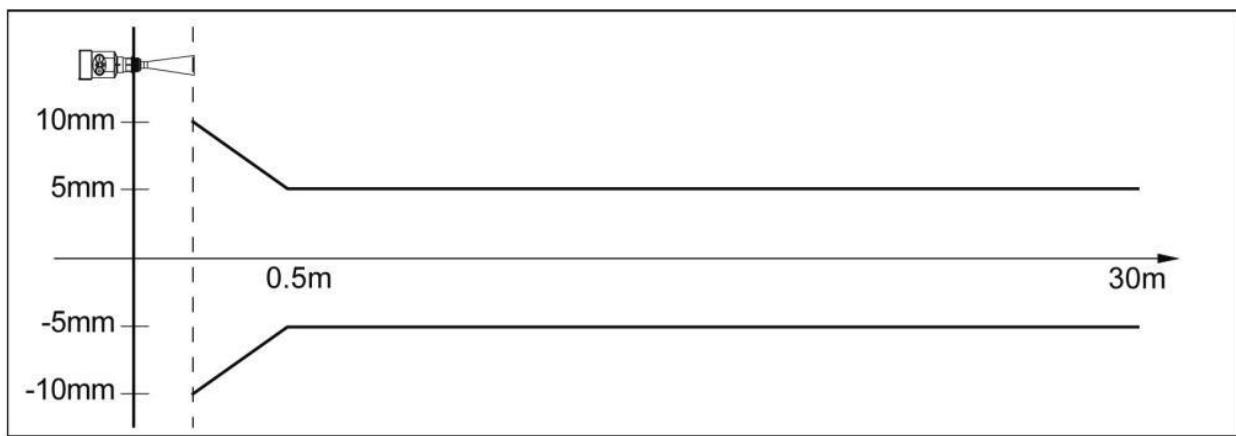


Wiring

- 24V two wire wiring diagram as follows:

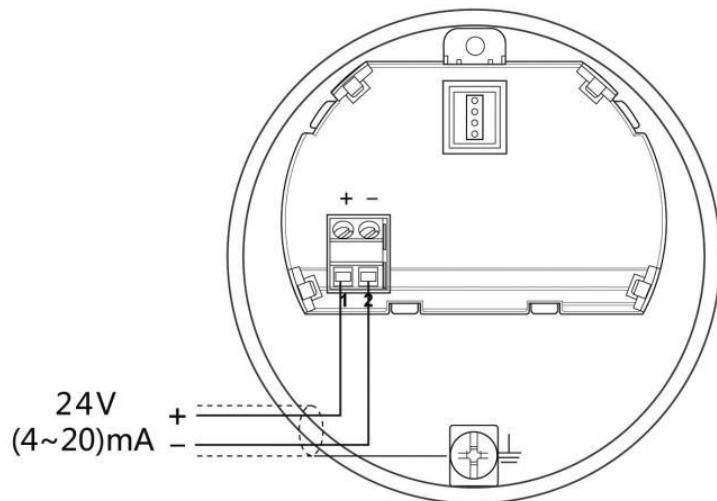

- 6~24V RS485/Modbus wiring diagram as follows:

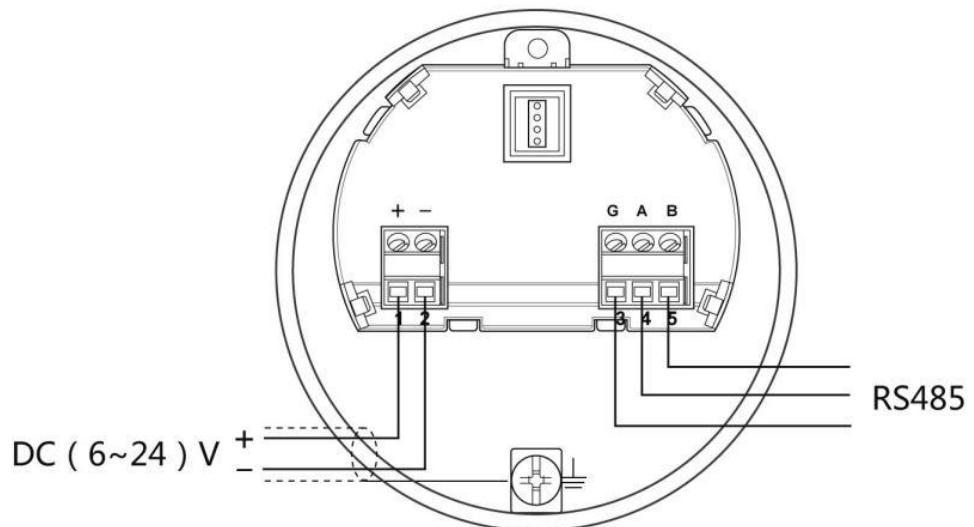

Ordering code

SUP-RD902-A-05-KC-A2-LG-TE-WH-00								Description
SUP-RD902	-	-	-	-	-	-	-	
Measuring Medium	A							Liquid
	05							5m
	10							10m
Measurement Range	15							15m
	20							20m
	30							30m
	XX							Others
Antenna Type		KC						Horn Mouth H205mm × Ø 76mm 304SS
		KD						Horn Mouth H205mm × Ø 76mm 316LSS
		KJ						Horn Mouth H290mm × Ø 96mm 304SS
		KK						Horn Mouth H290mm × Ø 96mm 316LSS
Output and Power Supply		A2						Two-wire 4-20mA+HART
		SC						4-20mA+HART, 24VDC
		R2						RS485, 24VDC
		XX						Others
Thread Type		LG						G1 1/2 304SS
		LN						NPT1 1/2 304SS
		LH						G1 1/2 316LSS
		LP						NPT1 1/2 316LSS
		FE						HG/T20592 PN10/25 DN80 304SS
		HA						HG/T20592 PN10/25 DN80 Swivel 304SS
		FK						HG/T20592 PN10/25 DN80 316LSS
		HE						HG/T20592 PN10/25 DN80 Swivel 316LSS
		FF						HG/T20592 PN10/16 DN100 304SS
		FH						HG/T20592 PN10/16 DN150 304SS
		HB						HG/T20592 PN10/16 DN100 Swivel 304SS
		FL						HG/T20592 PN10/16 DN100 316LSS
		FX						HG/T20592 PN10/16 DN150 316LSS
		HF						HG/T20592 PN10/16 DN100 Swivel 316LSS
		XX						Others
High Temperature Resistance		TE						-40-130°C
		TH						-40-230°C
Electrical Interface, Housing Material, and Ingress Protection		WH						M20 × 1.5 Cable Gland, Aluminum Alloy, IP67
Explosion-Proof Option		00						None
		E4						CNEX Ex db II C T6 Gb